




7U Case RW-702G

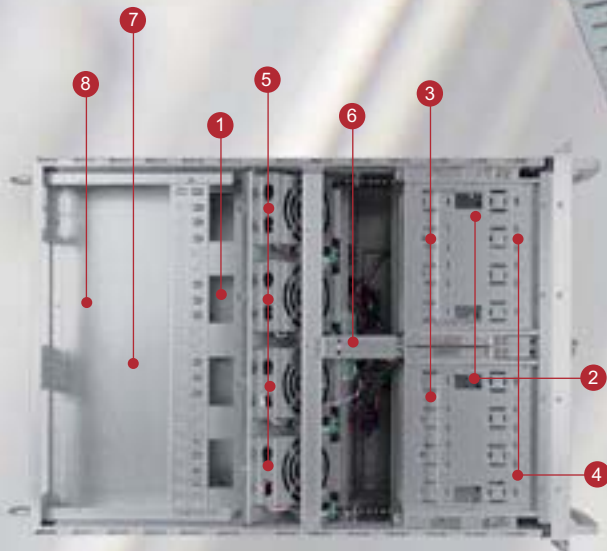

7U Case RW-702G

1. Space for ATX, Extended ATX, and SSI (quad CPU) mainboards
2. 2 cages with 4× vertical 5¼" bays each
3. Cages with 3× horizontal 5¼" bays optional
4. 1× 3½" and 12× 5¼" bays (all open) total
5. 4× 92 mm chassis fans in hot-swap frames
6. Supervisor board for chassis fans
7. Deck for horizontal-redundant power supply (for 2× PS/2 PSUs optional)
8. Space for 2× 80 mm chassis fans

www.rackmax.de



RW-702G

- Valuable rack case with aluminium front
- Low TCO due to its nice price and easy installation and maintenance
- Supports 4-fold redundant power supplies
- Detachable PSU carrier with ball-bearing guide rails
- Removable mainboard carrier on rolls allows for mainboard maintenance outside the case
- Lockable two-part aluminium door
- Chassis fans are electronically controlled and supervised
- On/Off and reset switch
- LED indicators for HDD activity, PSU and fan failure
- Sliding rails with mounting plates are supplied with the case
- PCI card holders in 3 different lengths for additional safety

LOGISTIC DATA:

Item #	10613
Net dimension (W×H×D)	310×440.5×632 mm (1'¼"×1'5⅜"×2'⅞")
Gross dimension (W×H×D)	510×650×840 mm (1'8⅞"×2'1⅝"×2'9⅞")
Net weight / gross weight	27.78 kg / 25.78 kg (50 lb 4 oz / 56 lb 13 oz)
Minimum order quantity	1 piece
Customs tariff #	84733090
Country of origin	Taiwan (R.O.C.)

TECHNICAL DATA:

Form factor	19" × 7U
Quantity of 5¼" bays	12× open
Quantity of 3½" bays	1× open
Quantity of extension slots	11× AGP/PCI
I/O shield	SSI
Mainboards supported	Full-size ATX, Extended ATX, SSI (up to 16"×13")
Chassis fans	4× 80 mm hot-swappable on the upper level built in 2× 80 mm on the lower level available as an option

